
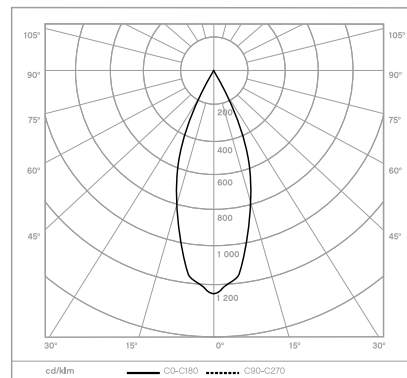
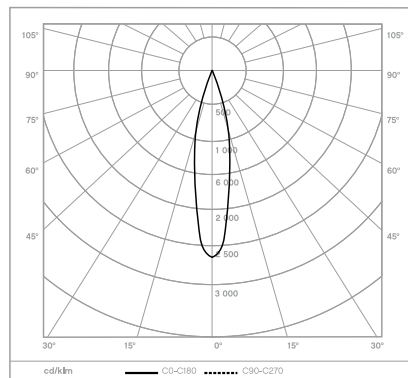
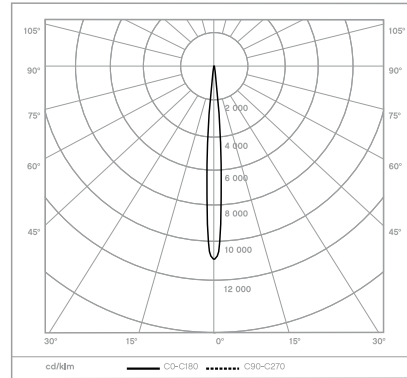
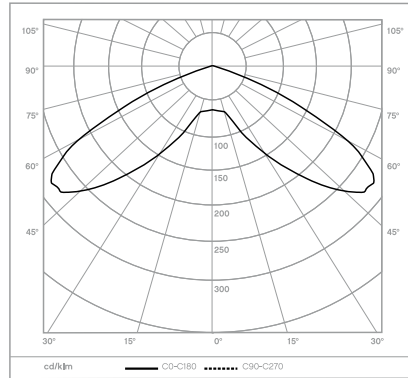


Voxo/ lightstack

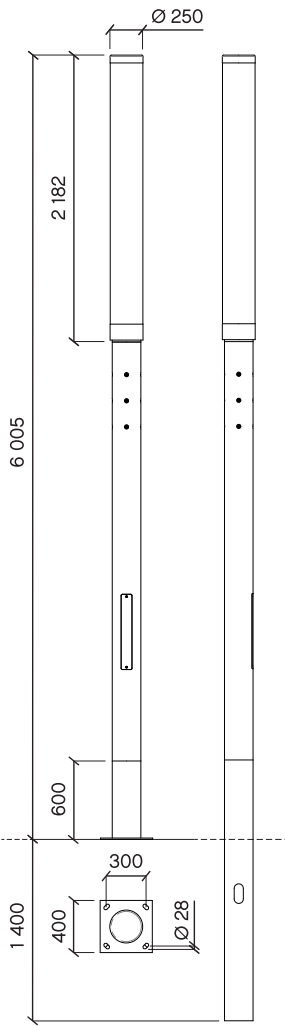

REFERENCE: 1 DOWNLIGHT PCO4060 / 1 DOWNLIGHT + 1 SPOTLIGHT PCO4160 / 1 D + 2 P PCO4260 / 1 D + 3 P PCO4360

SUPPORT

DESCRIPTION: Cylindrical shaft in glued laminated timber certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests (PEFC or FSC). Timber finished with three coats of woodstain (Aubrilam HTE process). Base with cylindrical section in galvanized steel finished in powder coated polyester. Design and production according to the general rules of the CUAP 01/06/2007 and the specifications of the European Technical Approval ETA-10/0089: 2010. CE marked product: Certificate of conformity CE 0679-CPD-0473. ANCHOR BOLTS: M24 x 600 CONCRETE BLOCK: 80x60⁴

HEAD

DESCRIPTION: Luminaire in aluminium equipped with clear polycarbonate sleeve, supply from 220-240V 50Hz electronic ballast, Class I, IP rating 65, resistance IK 08, pre-cabled in 3G1.5² up to column access door. Connection box not supplied. Colour: Grey 900 textured.

LAMP:

	Downlight (supplied)				Floodlight	
	90 W	140 W	70 W	150 W	35 W	70 W
Lamp	CPO	CPO	CDM-T	CDM-T	CDM-T	CDM-T
Beam angle	-	-	-	-	10° / 24° / 40°	10° / 24° / 40°
Socket	PGZ12	PGZ12	GI2	GI2	CDRM111	CDRM111

For reasons connected with overheating it is impossible to combine 140W CPO or 150 CDM-T with more than 2 floodlights.

