
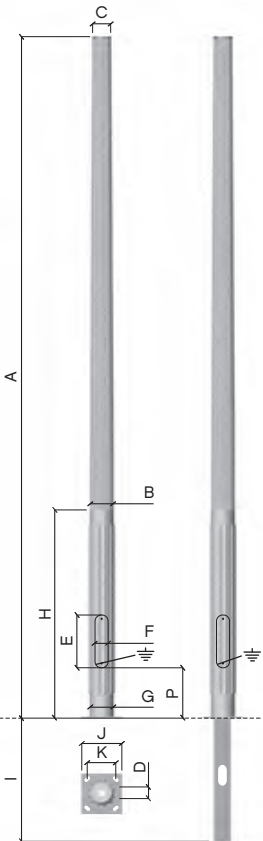


Catelam/ 4-8 m

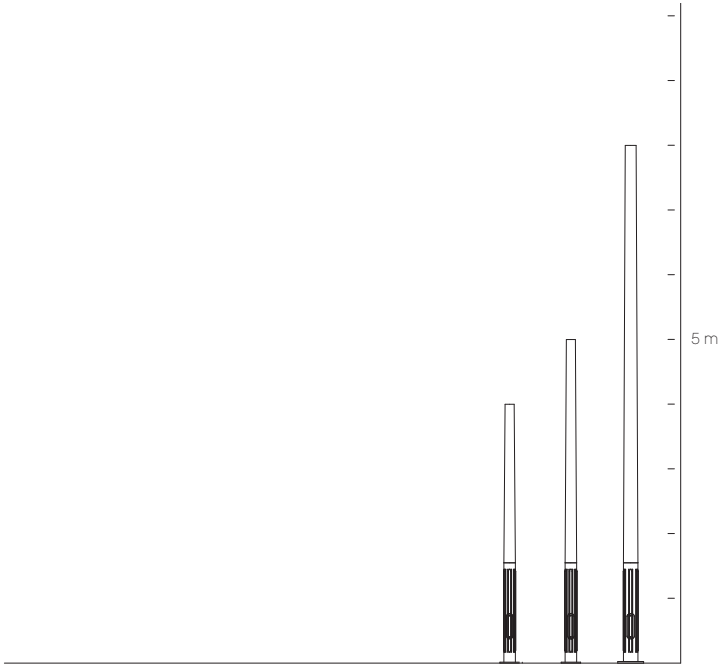

HEIGHT OF COLUMN

cross section of shaft at base

cross section of shaft at top

door: useful depth

door: useful height x useful width

distance from bottom of door/plate

cross section of base

base height

buried depth

base plate dimensions

distance between anchor bolts

anchor bolts

weight

REF	REF	A	B	C	D	E x F	P	G	H	I	J	K	L	
Column on flange plate	Column with buried root	M	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	kg
PCC0120	PCC1120	4	178	140	140	400 x 80	0,37	178	1,55	0,90	300 x 300	200 x 200	4 HA25/M24 - 600	38
PCC0123	PCC1123	5	178	140	140	400 x 80	0,37	178	1,55	0,90	300 x 300	200 x 200	4 HA25/M24 - 600	45
PCC0114	PCC1114	8	224	168	180	400 x 80	0,37	224	1,55	1,30	400 x 400	300 x 300	4 HA25/M24 - 600	101

DESCRIPTION: Tapered cylindrical glued laminated timber shaft certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests (PEFC or FSC). Timber finished with three coats of woodstain (Aubrilam HTE process). Ribbed cylindrical base in extruded aluminium finished in powder coated polyester. Pole covering cap in formed galvanized steel with powder coated polyester finish. Design and manufacture according to Building Eurocodes and European technical frame of reference CUAP 01/06/2007 * Wood and metal composite lighting columns *.