


MOSHI LED 2 Lighting bollard
LED 5.4 W - 342 lm*



MOSHI LED 2 BOLLARD	PMR0235
Height	0.8 m
Power	5.4 W*
Type of lamp	LED
Class	I
IP	64

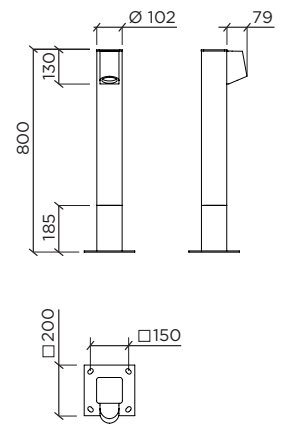

MEASUREMENTS

h x L x w: 800 x 100 x 100 mm
Weight: 10 kg



STANDARD COLOUR IDENTITY

Wood: Brume.
Metal: Matt fine textured 7024.



SQUARE SUPPORT

Regular square shaft in Accoya® acetylated glued laminated timber, produced with sawn planks from sustainably managed forests. Timber finished with four coats of woodstain. Square flush base and top in galvanized steel, polyester powder coated finish. Wall luminaire in cast aluminium, polyester powder coated finish. Clear safety glass.



FIXATION

Chemical sealing.
Anchor rods**: threaded rod M12 x 200.
Fixation holes on plate: 16 x 24 mm.

Cp Cycle path - **Pf** Pedestrian footpath - **S** Street




LED LIGHT 5.4 W*

Side emitting light distribution.



342 lm - Colour temperature 3 000 K.
Cast aluminium, aluminium and stainless steel.
Clear safety glass. Reflector in pure anodized aluminium.
Dust-proof and water jet protected.
Power supply LED 220-240 V - 0/50-60 Hz - DC 176-264 V.
Class I - IP 64 - IK 07 - Weight: 0.4 kg.

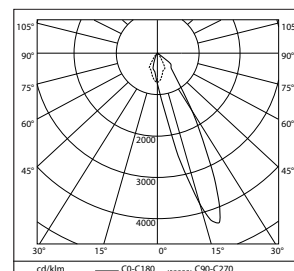

Light distribution LED 5.4 W.

NOTES

*Power and luminous flux data likely to vary.
**Anchor rods supplied on request only.