


NATTY XXL Lighting column
LED 21.5 W - 2 908 lm*



NATTY XXL COLUMN	PCO3036
Height	4 m
Power	21.5 W*
Type of lamp	LED

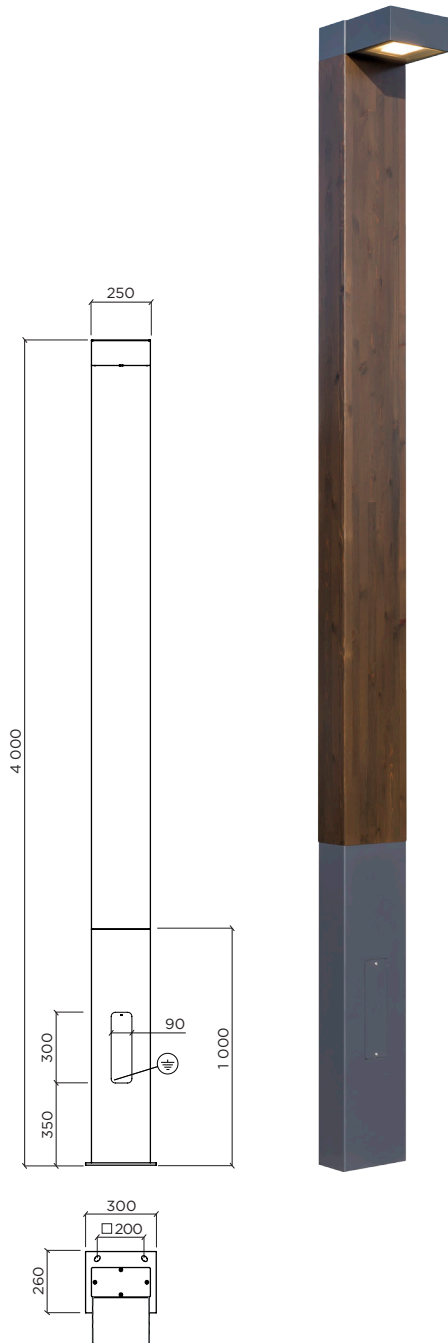

RECTANGULAR SUPPORT

Regular rectangular shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Rectangular flush base in galvanized steel, polyester powder coated finish. Overlying top in galvanized steel, polyester powder coated finish. Design and manufacture according to Building Eurocodes and European technical frame of reference defined by DEE 120017-00-0106 Wood and metal lighting columns.



FIXATION

Anchor rods**: 4 HA20/M18 x 400.
Spacing dimensions on plate: 200 x 200 mm.
Fixation hole on plate: 16 x 28 mm.



MEASUREMENTS

h x L x w: 3 500 x 250 x 125 mm
Weight: 53.4 kg



STANDARD COLOUR IDENTITY


Wood: Brume or Dark Mineral.
Metal: Matt fine textured 7024.

Cpa Car parking area - Pa Public area - Pr Public road - Ap Access path - Cp Cycle path - Pf Pedestrian footpath - S Street



LUMINAIRE LED 21.5 W*

Asymmetrical elliptical lighting.
2 908 lm - Colour temperature 3 000 K.
Cast aluminium, aluminium and stainless steel.
Clear safety glass. Reflector in pure anodized aluminium.
Dust-proof and water jet protected.
Pre-cabbling 3G1,5² - Length 1 m.
Power supply LED 220-240 V - 0/50-60 Hz.
DC 176-280 V - Start ≥ 190 V Dimmable DALI.
Class I - IP 65 - IK 06 - Weight: 3.1 kg.

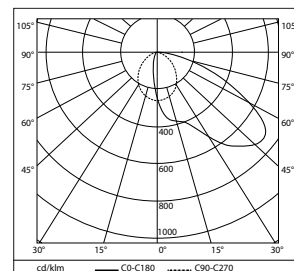

Light distribution LED 21.5 W.

NOTES

*Power and luminous flux data likely to vary.
**Anchor rods supplied on request only.