


OHASHI Brackets



MATERIALS

Bracket in galvanized welded steel, polyester powder coated finish. Extension spike in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain.
Cabling: cable puller installed at our factory.

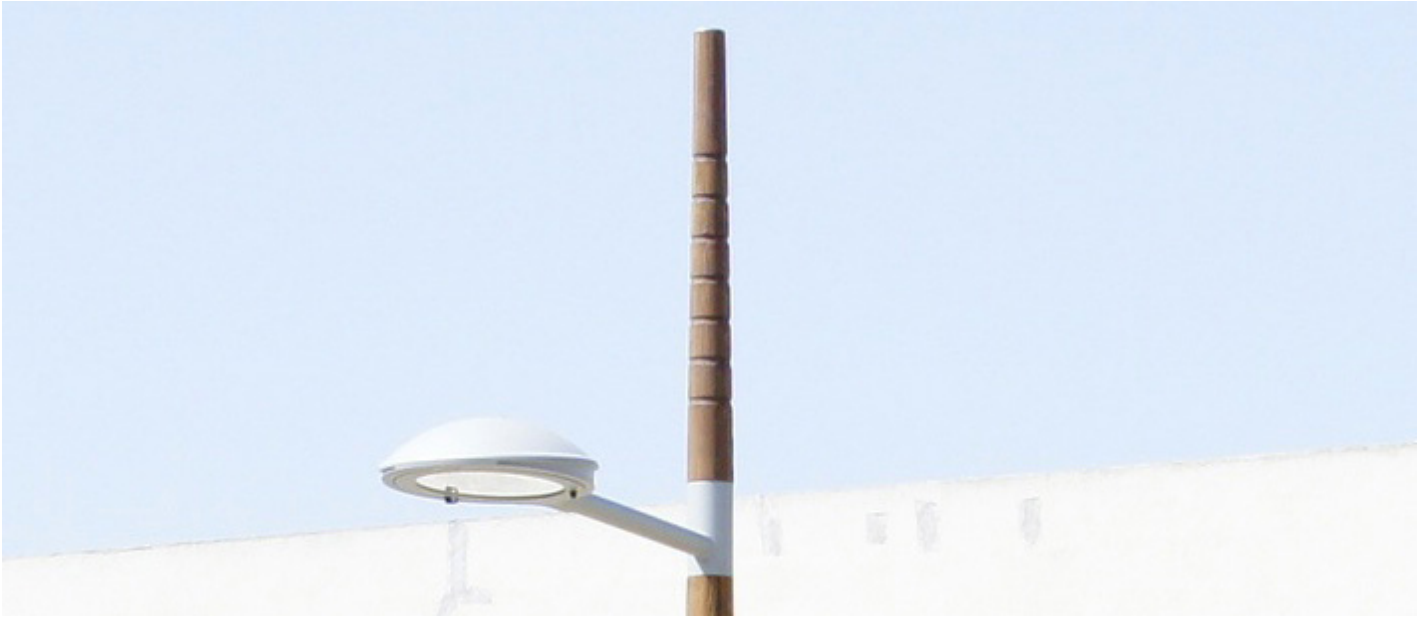

OHASHI	Reference	Extension	Height	Inclination	Scx	Weight
Single Ø 76 mm	POS0181	300 mm	880 mm	3°	0.10	4.5 kg
Double Ø 76 mm	POD0143	2 x 300 mm	880 mm	3°	0.13	5.7 kg
Single Ø 114 mm	POS0182	800 mm	1 330 mm	3°	0.25	11.5 kg
Double Ø 114 mm	POD0142	2 x 800 mm	1 330 mm	3°	0.32	14.8 kg

