


SILEA

Square tapered columns from 3 m to 4 m



SILEA		A. Pole height	B. Shaft section at base	C. Shaft section on top	D. Door: useful depth	E x F. Door: useful height x width	P. Distance door bottom to plate	G. Base section	H. Base height	I. Buried depth	J. Base plate dimensions	K. Spacing dimensions	L. Anchor rods*	
Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	kg
PCS1303	PCS2303	3	120	76	64	460 x 60	0.75	120	0.50	0.70	260 x 260	200 x 200	4 HA16/M14 - 300*	18
PCS1304	PCS2304	4	120	76	64	460 x 60	0.75	120	0.50	0.70	260 x 260	200 x 200	4 HA16/M14 - 300*	21
PCS1504	PCS2504	4	140	76	72	460 x 70	0.90	140	0.60	0.90	260 x 260	200 x 200	4 HA16/M14 - 300*	27

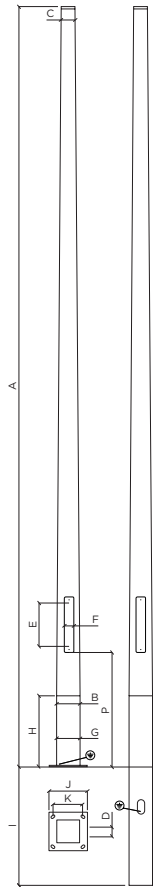

SQUARE TAPERED SHAFT

Square tapered shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Square flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

For 5 m to 10 m lighting columns, please contact us.  
\*Anchor rods supplied on request only.