


SUMU

Round columns from 3 m to 4 m

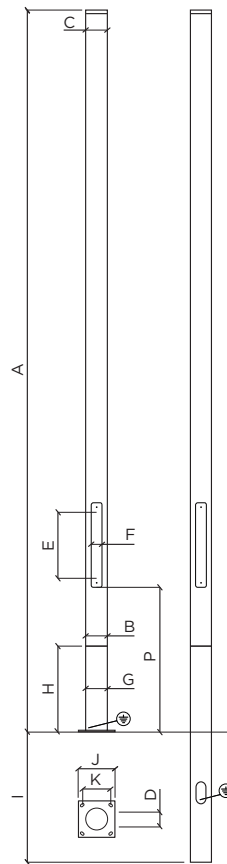

- A. Pole height
- B. Shaft diameter at base
- C. Shaft diameter on top
- D. Door: useful depth
- E x F. Door: useful height x width
- P. Distance door bottom to plate
- G. Base diameter
- H. Base height
- I. Buried depth
- J. Base plate dimensions
- K. Spacing dimensions
- L. Anchor rods*

SUMU

Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	kg
PCO6430	PCO7430	3	140	140	84	460 x 60	0.90	140	0.45	0.75	260 x 260	200 x 200	4 HA16/M14 - 300*	24
PCO6440	PCO7440	4	140	140	84	460 x 60	0.90	140	0.45	0.75	260 x 260	200 x 200	4 HA16/M14 - 300*	30



ROUND SHAFT

Cylindrical shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Cylindrical flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

For 5 m to 6 m lighting columns, please contact us.
 *Anchor rods supplied on request only.