


**SUN MADE** Solar lighting points from 4 m to 6 m  
LED 40 W - 4 800 lm



SUN MADE LED 40 W			PCS9461	PCS9561	PCS9661
A	m	Pole height	4	5	6
B	mm	Shaft section at base	160	160	200
C	mm	Shaft section on top	140	140	140
G	mm	Base section	160	160	200
H	m	Base height	0.6	0.6	0.75
J	mm	Base plate dimensions	300 x 300	300 x 300	400 x 400
K	mm	Spacing dimensions	260 x 260	260 x 260	300 x 300
L	mm	Anchor rods*	4 HA16 M14 - 300	4 HA16 M14 - 300	4 HA20 M18 - 400
kg		Weight	107	114	149
m		Height of the light	4.25	5.25	6.25

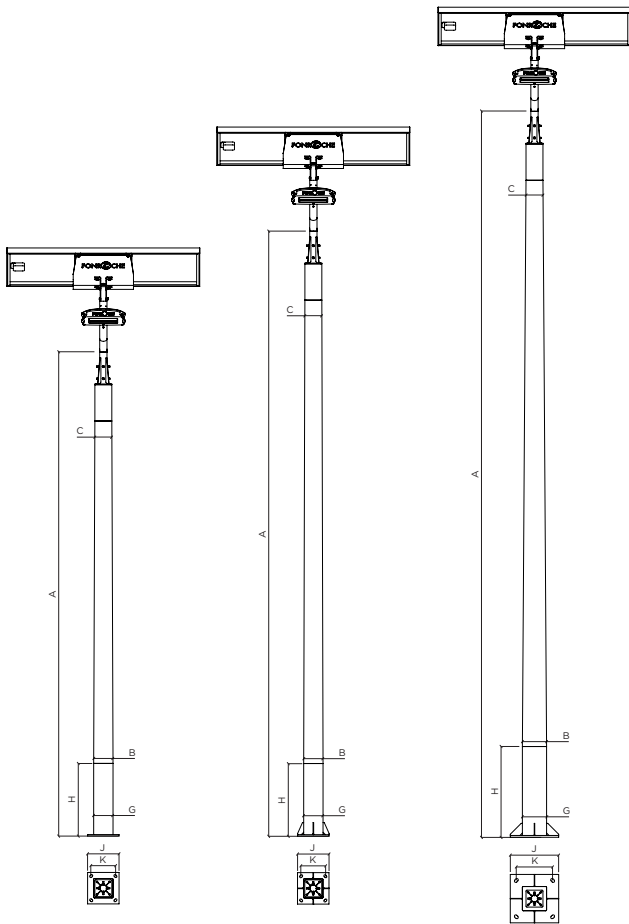

**SQUARE TAPERED SUPPORT**

Square tapered shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Square flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016.

**CE marked product: Conformity certificate CE 0679-CPR-0473.**



**STANDARD COLOUR IDENTITY**



Wood: Brume - Metal: Black 100 sanded.

Cpa Car parking area - Pr Public road - Ap Access path - Cp Cycle path - Pf Pedestrian footpath - S Street



**PHOTOVOLTAIC SOLAR MODULE 40 W**

Photovoltaic module 190 Wp.  
LED Block 40 W - 24 V.  
120 lm - Color temperature 4000 k.  
Power 365 technology:  
- smart system of energy management  
- programmable lighting  
- 24 V NiMH battery - 2 x 13 Ah - 624 Wh  
- resists extreme temperatures: -40°/+70°C  
Panel support, battery and LED block Black 200 sanded.

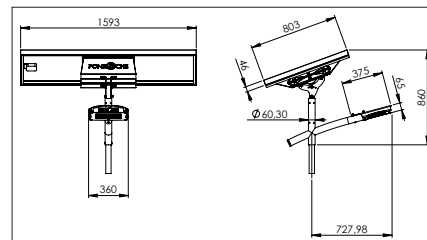

Light distribution  
LED 40 W.

**NOTES**

\*Anchor rods supplied on request only.