
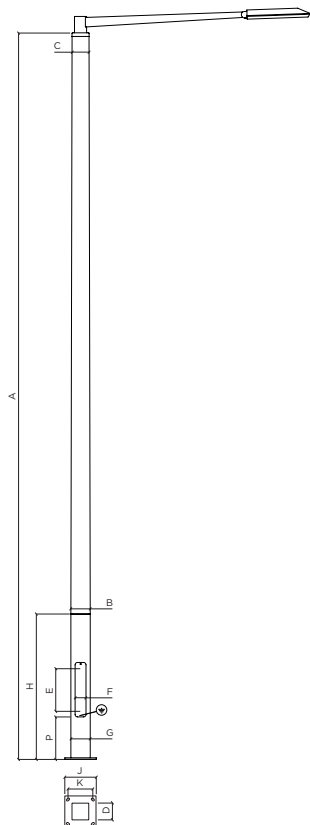


**UTYL 2** Lighting points 6 m  
LED 36.5 W - 4 484 lm\*



Square tapered      Round tapered

**UTYL 2 LED 36.5 W\***

|              |  | PCS9661             | PCD9661             |
|--------------|--|---------------------|---------------------|
| <b>A</b>     | <b>m Pole height</b>                     | <b>6</b>            | <b>6</b>            |
| <b>B</b>     | <b>mm Shaft section/diameter at base</b> | 160                 | 168                 |
| <b>C</b>     | <b>mm Shaft section/diameter on top</b>  | 140                 | 140                 |
| <b>D</b>     | <b>mm Door: useful depth</b>             | 137                 | 125                 |
| <b>E x F</b> | <b>mm Door: useful height x width</b>    | 450 x 90            | 450 x 90            |
| <b>P</b>     | <b>m Distance door bottom to plate</b>   | 0.35                | 0.35                |
| <b>G</b>     | <b>mm Base section/diameter</b>          | 160                 | 168                 |
| <b>H</b>     | <b>m Base height</b>                     | 1.2                 | 1.2                 |
| <b>J</b>     | <b>mm Base plate dimensions</b>          | 260 x 260           | 260 x 260           |
| <b>K</b>     | <b>mm Spacing dimensions</b>             | 200 x 200           | 200 x 200           |
| <b>L</b>     | <b>mm Anchor rods**</b>                  | 4 HA16<br>M14 - 300 | 4 HA16<br>M14 - 300 |
|              | <b>kg Weight</b>                         | 86.5                | 67                  |
|              | <b>m Height of the light</b>             | 6.12                | 6.12                |
|              | <b>m Offset reach of bracket to axis</b> | 1.9                 | 1.9                 |



**WOODEN SUPPORT**

Glued laminated timber GL24H shaft certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain.



Flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016.

**CE marked product: Conformity certificate CE 0679-CPR-0473.**

**SQUARE TAPERED SUPPORT**

Degressive square column  
Square base

**ROUND TAPERED SUPPORT**

Round tapered column  
Round base



**STANDARD COLOUR IDENTITY**



Wood: Brume - Metal: Black 100 sanded.

**Cpa** Car parking area - **Pr** Public road - **Ap** Access path - **Cp** Cycle path - **Pf** Pedestrian footpath - **S** Street



**LED LIGHT 36.5 W\***

- Asymmetrical elliptical lighting.
- 4 484 lm - Colour temperature 4 000 K (T° 3 000 K as option).
- Colour rendering index R<sub>a</sub> > 80.
- Cast aluminium, aluminium and stainless steel.
- Safety glass, antireflection-coated. Reflector in pure anodized aluminium.
- Dust-proof and water jet protected.
- Delivered with connecting cable X05BQ-F 4 x 1<sup>2</sup> - Length 10 m.
- Power supply LED 220-240 V - 0/50-60 Hz.
- DC 170-280 V - Dimmable 1-10 V.
- Class II - IP 66 - IK 08 - Weight: 14 kg.

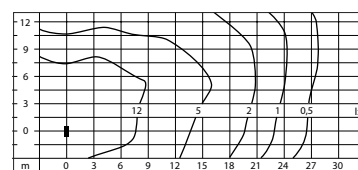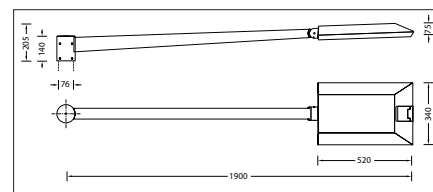

Light distribution LED 36.5 W.

**NOTES**

- Luminaires delivered without case, light head not assembled on the shaft.
- The lighting fixture must be connected to the earth of the base section thanks to the green/yellow wire provided for that purpose.
- \*Power and luminous flux data likely to vary.
- \*\*Anchor rods supplied on request only.