


**UTYL 2** Lighting points 8 m  
LED 6 x 53 W - 6 x 4 400 lm\*

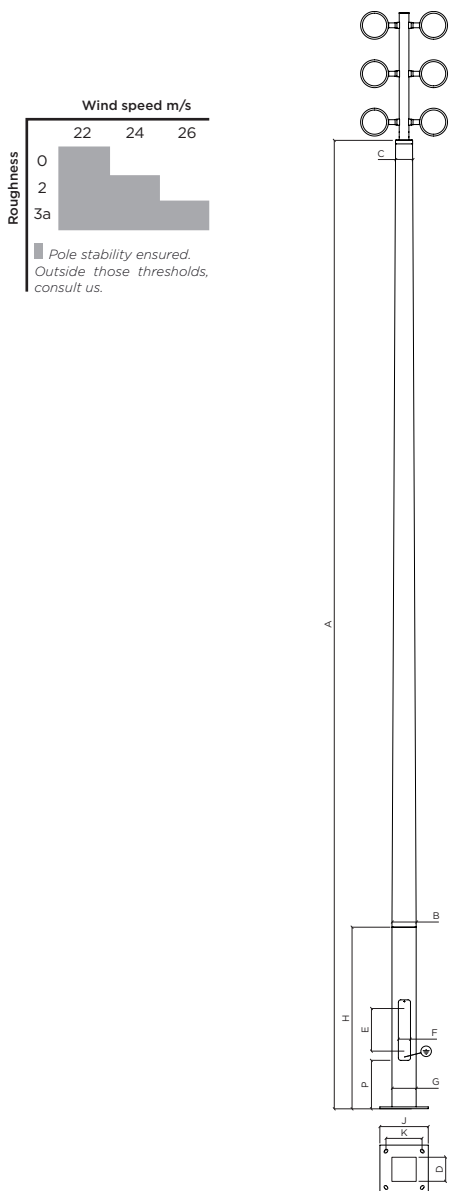

			Square tapered	Round tapered
<b>UTYL LED 6 X 53 W*</b>			<b>PCS9805</b>	<b>PCD9805</b>
<b>A</b>	m	Pole height	<b>8</b>	<b>8</b>
<b>B</b>	mm	Shaft section/diameter at base	200	194
<b>C</b>	mm	Shaft section/diameter on top	140	140
<b>D</b>	mm	Door: useful depth	175	148
<b>E x F</b>	mm	Door: useful height x width	500 x 100	450 x 100
<b>P</b>	m	Distance door bottom to plate	0.4	0.35
<b>G</b>	mm	Base section/diameter	200	194
<b>H</b>	m	Base height	1.5	1.2
<b>J</b>	mm	Base plate dimensions	400 x 400	400 x 400
<b>K</b>	mm	Spacing dimensions	300 x 300	300 x 300
<b>L</b>	mm	Anchor rods**	4 HA20 M18 - 400	4 HA20 M18 - 400
	kg	Weight	162.2	112
	m	Height of uppermost light	8.95	8.95
	m	Centre distance between spotlights	0.4	0.4

**WOODEN SUPPORT**  
 Glued laminated timber GL24H shaft certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain.  
 Flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016.

**CE marked product: Conformity certificate CE 0679-CPR-0473.**



<b>SQUARE TAPERED SUPPORT</b>	<b>ROUND TAPERED SUPPORT</b>
Degressive square column	Round tapered column
Square base	Round base

**STANDARD COLOUR IDENTITY**  
 Wood: Brume - Metal: Black 100 sanded.

**Cpa** Car parking area - **Pa** Public area - **Cp** Cycle path - **Pf** Pedestrian footpath



**LED SPOTLIGHT 6 X 53 W\***  
 Rotationally symmetrical lighting.  
 6 x 4 400 lm - Colour temperature 4 000 K (T° 3 000 K as option).  
 Colour rendering index R<sub>a</sub> > 80.  
 Cast aluminium, aluminium and stainless steel.  
 Clear safety glass, antireflection-coated. Reflector in pure anodized aluminium.  
 Dust-proof and water jet protected.  
 Rotation range of floodlight 350°, swivel range -35°/+90°.  
 Delivered with connecting cable X05BQ-F 5G 1<sup>2</sup> - Length 1 m.  
 Power supply LED 220-240 V - 0/50-60 Hz.  
 DC 170-280 V - Dimmable 1-10 V.  
 Class I - IP 65 - IK 07 - Weight: 4 kg.

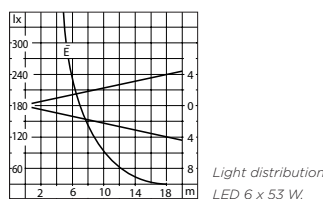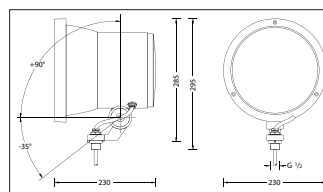

**NOTES**  
 Luminaires delivered without case, light head not assembled on the shaft.  
 \*Power and luminous flux data likely to vary.  
 \*\*Anchor rods supplied on request only.