


DÔME

Round tapered columns from 3 m to 4 m



DÔME		A. Pole height	E x F. Door: useful height x width					I. Buried depth						
Ref.	Ref.	B. Shaft diameter at base	P. Distance door bottom to plate		J. Base plate dimensions		K. Spacing dimensions		L. Anchor rods*					
		C. Shaft diameter on top	D. Door: useful depth	H. Base height										
Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	kg
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	
PCD2430	PCD3430	3	140	76	62	460 x 60	0.90	140	0.45	0.75	260 x 260	200 x 200	4 HA16/M14 - 300*	17
PCD2440	PCD3440	4	140	76	62	460 x 60	0.90	140	0.45	0.75	260 x 260	200 x 200	4 HA16/M14 - 300*	20

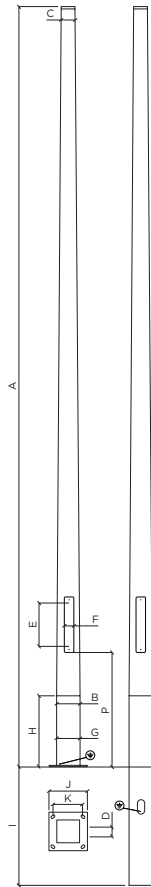

ROUND TAPERED SHAFT

Round tapered shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Round flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

For 5 m to 10 m lighting columns, please contact us.  
\*Anchor rods supplied on request only.