


DÔME XL

Round tapered columns from 3 m to 10 m

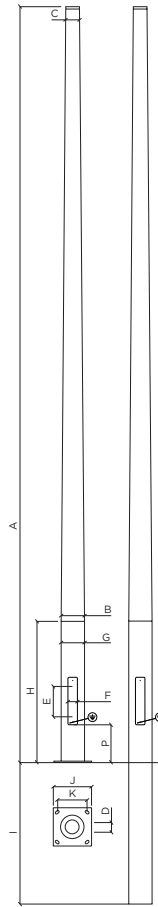

- A. Pole height
- B. Shaft diameter at base
- C. Shaft diameter on top
- D. Door: useful depth
- E x F. Door: useful height x width
- P. Distance door bottom to plate
- G. Base diameter
- H. Base height
- I. Buried depth
- J. Base plate dimensions
- K. Spacing dimensions
- L. Anchor rods*

DÔME XL

Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	kg
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	
PCD0335	PCD1335	3	115	76	61	300 x 90	0.35	115	1.00	0.80	260 x 260	200 x 200	4 HA16/M14 - 300*	19
PCD0326	PCD1326	4	115	76	61	300 x 90	0.35	115	1.00	0.80	260 x 260	200 x 200	4 HA16/M14 - 300*	21
PCD0328	PCD1328	4	140	76	93	350 x 90	0.35	140	1.10	0.90	260 x 260	200 x 200	4 HA16/M14 - 300*	27
PCD0327	PCD1327	5	115	76	61	300 x 90	0.35	115	1.00	0.80	260 x 260	200 x 200	4 HA16/M14 - 300*	24
PCD0329	PCD1329	5	140	76	93	350 x 90	0.35	140	1.10	0.90	260 x 260	200 x 200	4 HA16/M14 - 300*	30
PCD0305	PCD1305	5	168	120	125	450 x 90	0.35	168	1.20	1.30	260 x 260	200 x 200	4 HA16/M14 - 300*	42
PCD0330	PCD1330	6	140	76	93	400 x 90	0.35	140	1.10	0.90	260 x 260	200 x 200	4 HA16/M14 - 300*	33
PCD0306	PCD1306	6	168	120	125	450 x 90	0.35	168	1.20	1.30	260 x 260	200 x 200	4 HA16/M14 - 300*	48
PCD0368	PCD1338	7	168	120	125	450 x 90	0.35	168	1.20	1.30	400 x 400	300 x 300	4 HA16/M14 - 300*	54
PCD0377	PCD1377	7	194	140	148	450 x 100	0.35	194	1.20	1.40	400 x 400	300 x 300	4 HA20/M18 - 400*	71
PCD0378	PCD1378	8	194	140	148	450 x 100	0.35	194	1.20	1.40	400 x 400	300 x 300	4 HA20/M18 - 400*	78
PCD0315	PCD1315	8	220	140	175	500 x 100	0.35	220	1.35	1.50	400 x 400	300 x 300	4 HA20/M18 - 400*	112
PCD0379	PCD1379	9	194	140	148	450 x 100	0.35	194	1.20	1.40	400 x 400	300 x 300	4 HA20/M18 - 400*	86
PCD0316	PCD1316	9	220	140	175	500 x 100	0.35	220	1.35	1.50	400 x 400	300 x 300	4 HA20/M18 - 400*	121
PCD0311	PCD1311	10	220	140	175	500 x 100	0.35	220	1.35	1.50	400 x 400	300 x 300	4 HA20/M18 - 400*	130
PCD0333	PCD1333	10	245	140	195	500 x 120	0.35	245	1.50	1.50	400 x 400	300 x 300	4 HA20/M18 - 400*	153



ROUND TAPERED SHAFT

Round tapered shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Round flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE I20017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

*Anchor rods supplied on request only.