


DÔME XL

Very high round tapered columns from 12 m to 14 m

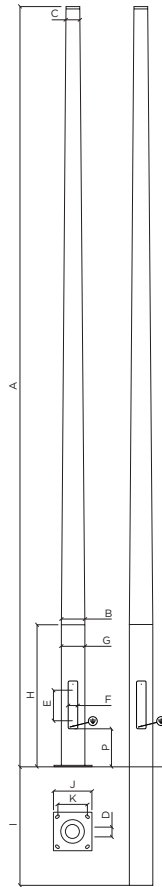

DÔME XL

- A. Pole height
- B. Shaft diameter at base
- C. Shaft diameter on top
- D. Door: useful depth
- E x F. Door: useful height x width
- G. Base diameter
- H. Base height
- I. Buried depth
- J. Base plate dimensions
- K. Spacing dimensions
- L. Anchor rods*

Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	kg
PCD0346	PCD1346	12	245	140	195	500 x 120	0.35	245	1.50	1.50	400 x 400	300 x 300	4 HA20/M18 - 400*	180
PCD0347	PCD1347	12	275	140	226	500 x 120	0.35	275	1.50	1.50	400 x 400	300 x 300	4 HA25/M24 - 600*	195
PCD0349	PCD1349	14	275	140	226	500 x 120	0.35	275	1.50	1.50	400 x 400	300 x 300	4 HA25/M24 - 600*	220



ROUND TAPERED SHAFT

Round tapered shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Round flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

*Anchor rods supplied on request only.