


MOSHI

Square columns from 3 m to 4 m



MOSHI		A. Pole height					E x F. Door: useful height x width			I. Buried depth				
Ref.	Ref.	B. Shaft section at base					P. Distance door bottom to plate			J. Base plate dimensions				
		C. Shaft section on top					G. Base section			K. Spacing dimensions				
		D. Door: useful depth					H. Base height			L. Anchor rods*				
Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	kg
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	
PCO3230	PCO2230	3	120	120	78	460 x 60	1	120	0.50	0.70	260 x 260	200 x 200	4 HA16/M14 - 300*	20
PCO3240	PCO2240	4	120	120	78	460 x 60	1	120	0.50	0.70	260 x 260	200 x 200	4 HA16/M14 - 300*	24
PCO3440	PCO2440	4	140	140	93	460 x 70	1	140	0.60	0.90	260 x 260	200 x 200	4 HA16/M14 - 300*	32

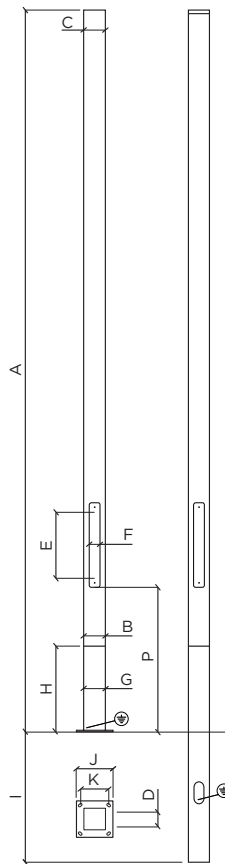

SQUARE SHAFT

Regular square shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Square flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

For 5 m to 6 m lighting columns, please contact us.
*Anchor rods supplied on request only.