


**OHASHI**

Specific columns from 3.5 m to 8 m

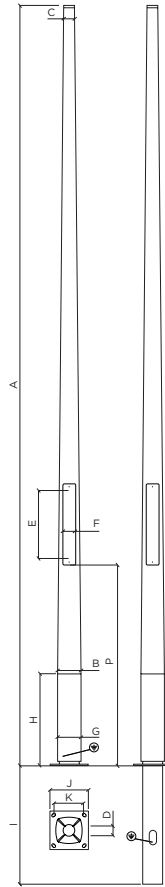

- A. Pole height
- B. Shaft section at base
- C. Shaft section on top
- D. Door: useful depth
- E x F. Door: useful height x width
- P. Distance door bottom to plate
- G. Base section
- H. Base height
- I. Buried depth
- J. Base plate dimensions
- K. Spacing dimensions
- L. Anchor rods\*

**OHASHI**

Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	kg
PCH1653	PCH2653	3.5	160	76	80	400 x 70	0.9	160	0.20	0.9	260 x 260	200 x 200	4 HA16/M14 - 300*	50
PCH1604	PCH2604	4	160	76	80	400 x 70	0.9	160	0.20	0.9	260 x 260	200 x 200	4 HA16/M14 - 300*	52
PCH1605	PCH2605	5	160	76	80	400 x 70	0.9	160	0.20	0.9	260 x 260	200 x 200	4 HA16/M14 - 300*	56
PCH1206	PCH2206	6	250	114	150	400 x 90	1.25	250	0.20	1.5	400 x 400	300 x 300	4 HA20/M18 - 400*	140
PCH1207	PCH2207	7	250	114	150	400 x 90	1.25	250	0.20	1.5	400 x 400	300 x 300	4 HA20/M18 - 400*	147
PCH1208	PCH2208	8	250	114	150	400 x 90	1.25	250	0.20	1.5	400 x 400	300 x 300	4 HA20/M18 - 400*	156



**SQUARE BASE TO ROUND TOP**



Variable section shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Square base in galvanized steel and polyester powder coated finish. Extruded aluminium base, polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to Building Eurocodes and European technical frame of reference defined by DEE 120017-00-0106 Wood and metal lighting columns.

**NOTE**

\*Anchor rods supplied on request only.