


SILEA XL

Square tapered columns from 4 m to 10 m



SILEA XL		A. Pole height	B. Shaft section at base	C. Shaft section on top	D. Door: useful depth	E x F. Door: useful height x width	P. Distance door bottom to plate	G. Base section	H. Base height	I. Buried depth	J. Base plate dimensions	K. Spacing dimensions	L. Anchor rods*	
Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	kg
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	
PCS3304	PCS4304	4	120	76	97	300 x 80	0.35	120	1.00	0.80	260 x 260	200 x 200	4 HA16/M14 - 300*	26
PCS3305	PCS4305	5	120	76	97	300 x 80	0.35	120	1.00	0.80	260 x 260	200 x 200	4 HA16/M14 - 300*	29
PCS3505	PCS4505	5	140	76	117	400 x 90	0.35	140	1.20	1.00	260 x 260	200 x 200	4 HA16/M14 - 300*	42
PCS3506	PCS4506	6	140	76	117	400 x 90	0.35	140	1.20	1.00	260 x 260	200 x 200	4 HA16/M14 - 300*	45
PCS3606	PCS4606	6	160	120	137	450 x 90	0.35	160	1.20	1.30	260 x 260	200 x 200	4 HA20/M18 - 400*	62
PCS3617	PCS4607	7	160	120	137	450 x 90	0.35	160	1.20	1.30	400 x 400	300 x 300	4 HA20/M18 - 400*	69
PCS3708	PCS4708	8	200	140	177	500 x 100	0.40	200	1.50	1.50	400 x 400	300 x 300	4 HA20/M18 - 400*	121
PCS3709	PCS4709	9	200	140	177	500 x 100	0.40	200	1.50	1.50	400 x 400	300 x 300	4 HA20/M14 - 400*	130
PCS3909	PCS4909	9	220	140	197	500 x 100	0.40	220	1.50	1.50	400 x 400	300 x 300	4 HA25/M24 - 600*	142
PCS3910	PCS4910	10	220	140	197	500 x 100	0.40	220	1.50	1.50	400 x 400	300 x 300	4 HA25/M24 - 600*	153
PCS3210	PCS4210	10	250	140	223	500 x 120	0.40	250	1.50	1.50	400 x 400	300 x 300	4 HA25/M24 - 600*	191

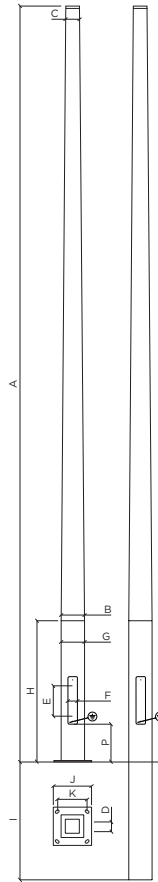

SQUARE TAPERED SHAFT

Square tapered shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Square flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

*Anchor rods supplied on request only.