


SILEA XL

Very high square tapered columns from 12 m to 16 m

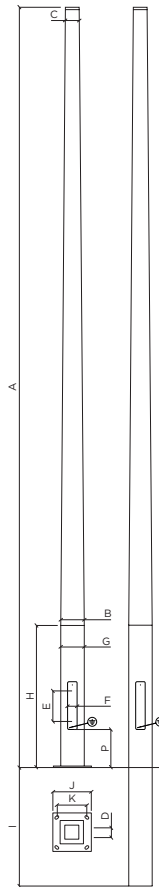

SILEA XL

- A. Pole height
- B. Shaft section at base
- C. Shaft section on top
- D. Door: useful depth
- E x F. Door: useful height x width
- G. Base section
- H. Base height
- I. Buried depth
- J. Base plate dimensions
- K. Spacing dimensions
- L. Anchor rods*

Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	kg
PCS3212	PCS4212	12	250	140	223	500 x 120	0.40	250	1.50	1.50	400 x 400	300 x 300	4 HA25/M24 - 600*	215
PCS3412	PCS4412	12	300	160	273	450 x 120	0.35	300	1.50	2.00	500 x 500	400 x 400	8 HA25/M24 - 600*	283
PCS3414	PCS4414	14	300	160	273	450 x 120	0.35	300	1.50	2.00	500 x 500	400 x 400	8 HA25/M24 - 600*	315
PCS3616	PCS4616	16	350	160	323	450 x 120	0.35	350	1.50	2.00	550 x 550	450 x 450	8 HA25/M24 - 600*	425



SQUARE TAPERED SHAFT

Square tapered shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Square flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

*Anchor rods supplied on request only.