


SUMU XL

Round columns from 3 m to 6 m



SUMU XL		A. Pole height	B. Shaft diameter at base	C. Shaft diameter on top	D. Door: useful depth	E x F. Door: useful height x width	G. Base diameter	H. Base height	I. Buried depth	J. Base plate dimensions	K. Spacing dimensions	L. Anchor rods*		
Ref.	Ref.	A	B	C	D	E x F	P	G	H	I	J	K	L	kg
Flange plate	Buried root	m	mm	mm	mm	mm	m	mm	m	m	mm	mm	mm	
PCO5130	PCO4130	3	115	115	61	300 x 90	0.35	115	1.00	0.80	260 x 260	200 x 200	4 HA16/M14 - 300*	23
PCO5140	PCO4140	4	115	115	61	300 x 90	0.35	115	1.00	0.80	260 x 260	200 x 200	4 HA16/M14 - 300*	28
PCO5440	PCO4440	4	140	140	93	350 x 90	0.35	140	1.10	0.90	260 x 260	200 x 200	4 HA16/M14 - 300*	37
PCO5150	PCO4150	5	115	115	61	300 x 90	0.35	115	1.00	0.80	260 x 260	200 x 200	4 HA16/M14 - 300*	32
PCO5450	PCO4450	5	140	140	93	350 x 90	0.35	140	1.10	0.90	260 x 260	200 x 200	4 HA16/M14 - 300*	43
PCO5460	PCO4460	6	140	140	93	350 x 90	0.35	140	1.10	0.90	260 x 260	200 x 200	4 HA16/M14 - 300*	50
PCO5660	PCO4660	6	168	168	125	450 x 90	0.35	168	1.20	1.30	260 x 260	200 x 200	4 HA16/M14 - 300*	65

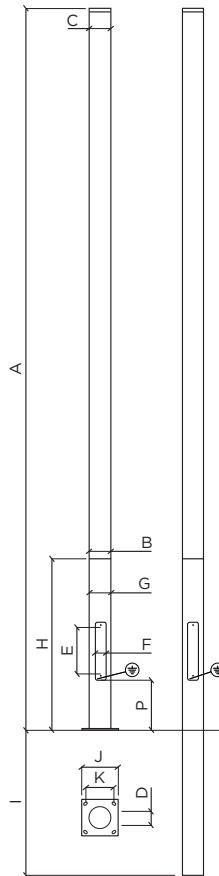

ROUND SHAFT

Cylindrical shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain. Cylindrical flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016. **CE marked product: Conformity certificate CE 0679-CPR-0473.**



NOTE

*Anchor rods supplied on request only.