


NATTY 3 Lighting bollard
LED 7 W - 450 lm*



NATTY 3 BOLLARD	PBD0715
Height	1.07 m
Power	7 W*
Type of lamp	LED
Class	I
IP	55

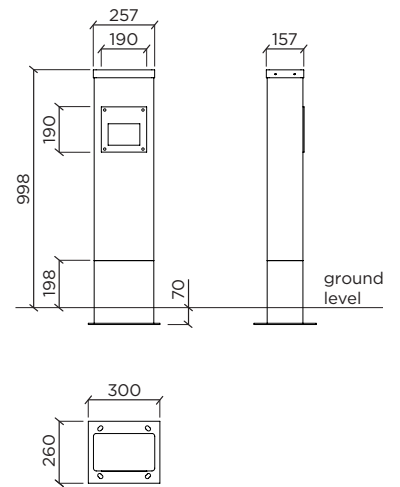

MEASUREMENTS
h x L x w: 1 068 x 257 x 157 mm
Weight: 22 kg

STANDARD COLOUR IDENTITY
Wood: Brume or Dark Mineral.
Metal: Matt fine textured 7024.


RECTANGULAR SUPPORT
Regular rectangular shaft in Accoya® acetylated glued laminated timber, produced with sawn planks from sustainably managed forests. Timber finished with four coats of woodstain. Rectangular flush base in galvanized steel, polyester powder coated finish. Overlying top in galvanized steel, polyester powder coated finish.
Connexion box with drawer for Neozed 16A installation. Synthetic shock resistant case. Protection degree IP 55. Protection class II. For diversion cabling until 5 x 4².

FIXATION
Fixing with 4 stainless steel dowels anchor bolts**: M12 x 100.
Spacing dimensions on plate: 200 x 200 mm.
Fixation hole on plate: 16 x 24 mm.

Cpa Car parking area - **Pa** Public area - **Cp** Cycle path - **Pf** Pedestrian footpath - **S** Street



LUMINAIRE LED 7 W*
Asymmetrical flat beam light distribution.
450 lm - Colour temperature 3 000 K (T° 4 000 K as option).
Cast aluminium, aluminium and stainless steel.
Safety glass with optical structure. Reflector in pure anodized aluminium.
Dust-proof and water jet protected.
Pre-cablings 3G1,5² - Length 1 m.
Power supply LED 220-240 V - 0/50-60 Hz. DC 176-280 V.
Class I - IP 65 - IK 07 - Weight: 1.5 kg.



Light distribution
LED 7 W.

NOTES
The power supply is located on the top part of the bollard: prepare enough cable length to proceed with the connection.
*Power and luminous flux data likely to vary.
**Other type of fixing on consultation.