


# NOTCHE

## Lighting bollard

PBD09571 Notche 1 / 648 lm - 9 W / Lighting

### Use

Lighting bollard for the access pathways.



Broad light distribution

### Notche 1

#### 2 x 4.5 W LED lights

Double recessed luminaire with broad spread light distribution.  
LED power supply unit 220-240 V - 0/50-60 Hz - DC 170-280 V.  
Luminaire made of aluminium alloy, aluminium and stainless steel. Clear safety glass.  
Silicone gasket. Dust-tight and water jet protected.

Safety class II

☞ Safety mark  
Protection class IP 65

CE Conformity mark  
Impact strength IK10

### Source


**Luminaire connected wattage** 4.5 W  
Luminaire luminous flux 324 lm  
Luminaire luminous efficiency 72 lm/W  
Colour temperature\* 3 000 K (CRI > 80)  
Ambient temperature  $t_{a,max} = 55^{\circ}\text{C}$   
20-year LED module availability guarantee.  
\*Other colour temperatures on request.

### Luminaire colour

■ Stainless steel  
Alternative finishes and salt air protection on request.



PBD09571 Notche 1 20 lux 1 lux

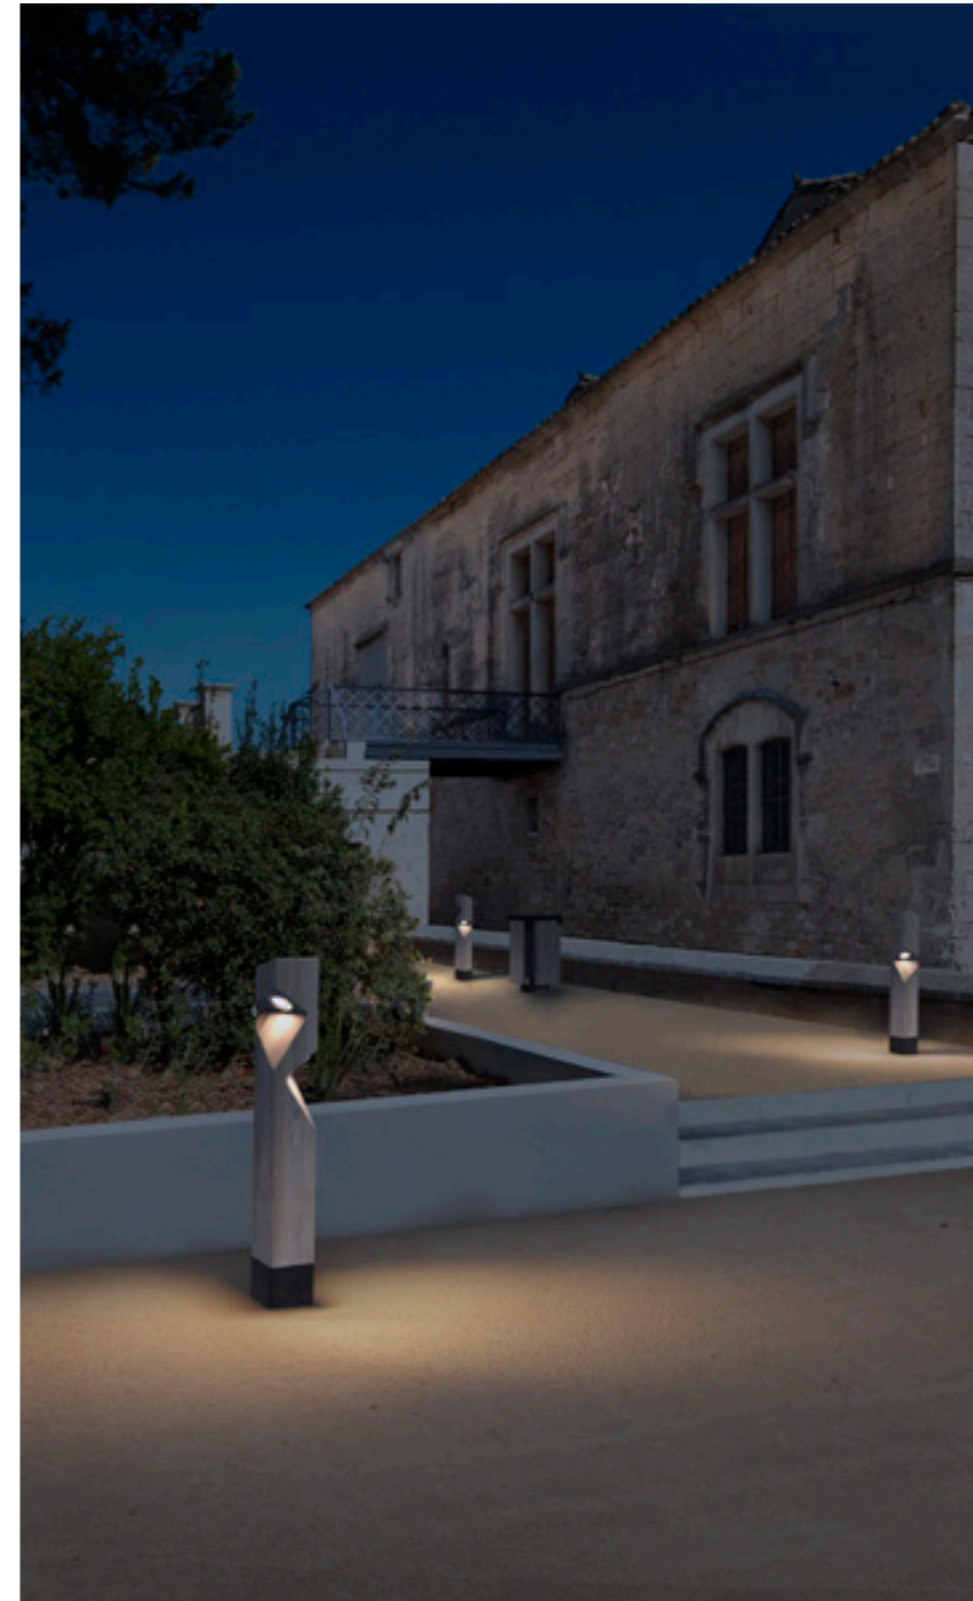

### Notche - Lighting bollard 1

Notche - Lighting bollards 2  
Notche - Light building elements 4 m - 38 W / 57 W  
Notche - Light building elements 5 m - 38 W / 57 W / 76 W  
Notche - Light building elements 6 m - 80 W / 120 W / 160 W

### Square shaft

Accoya® acetylated solid wood square shaft made from sawn timber from sustainably managed forests. Timber finished with four coats of woodstain. Flush square base in galvanized steel and polyester powder coated finish.

Safety class II  
Protection class IP 55

### Standard finishes

Wood: Alizé  
Metal: Matt fine texture 7024  
Finish corresponding to the reference PBD09571.  
Other colours on request.

### Benefits of Accoya® wood

Accoya® wood has a non-toxic core treatment. It is a very dimensionally stable material (equivalent to the best exotic wood). It is renewable, durable, resistant to moisture, insects, and rot.

### Maintenance and lifespan

Accoya® wood offers a 25-year warranty against rot (if the wood is placed in the ground) and a 50-year warranty for above-ground wood (even if it is continuously exposed to fresh water). Very low maintenance.

### Power supply

The terminal is powered via two connection boxes located at the base.

### Installation

Fixing with 4 stainless steel anchor studs M10 x 120, supplied only on request. Other type of fixing on consultation.

Technical data can be consulted and downloaded on our website.

Wood material:



	LED	Height	L x l	Base height	Base plate dimensions	Spacing dimensions	Fixation hole on plate	Anchor studs	Weight
PBD09571	9 W	1 m	140 x 140 mm	120 mm	130 x 125 mm	100 x 100 mm	12 x 18 mm	4 x M10 - 120 mm	13 kg

Version with 230 x 230 mm fixing plate, and fixing centre distance 180 x 180 mm upon request.

Design  
by  
AUBRILAM.