




## LADY LED

Lighting bollard / 1 143 lm - 16.8 W / Visual guidance

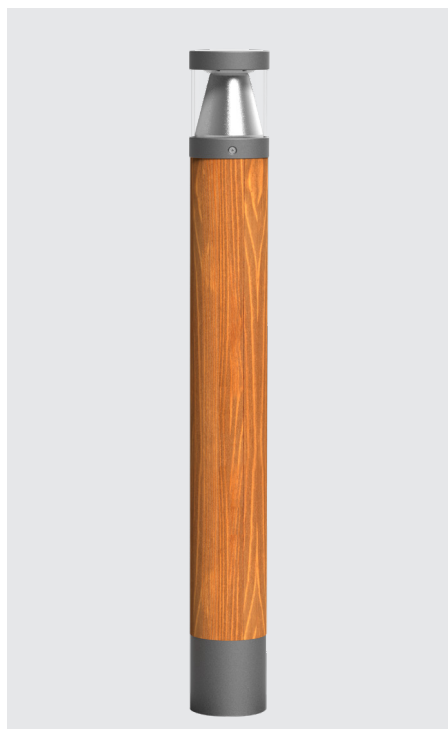

LED	Height	Diameter	Base height	Plate dimensions	Spacing dimensions	Fixation hole on plate	Anchor studs	Weight
16.8 W	1 m	120 mm	120 mm	200 x 200 mm	150 x 150 mm	14 x 28 mm	4 HA20/M12 - 100 mm	9 kg

Finished ground level: 70 mm.

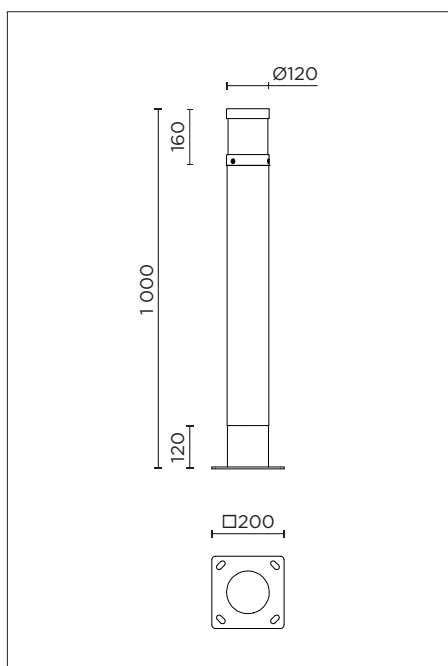

Light distribution  
16.8 W

### Lady LED LED light 16.8 W

LED luminaire with shielded light. Extensive light distribution with symmetrical rotation. No distribution box. HO7RNF connection cable of 1 m in 3G1<sup>2</sup>. LED power supply unit 220-240 V - 50-60 Hz. Luminaire made of powder-coated aluminium with stainless steel screws. Clear PMMA bowl. Dust-tight and water jet protected.

Safety class I

CE Conformity mark  
Protection class IP 65  
Impact strength IK06

### Lamp

**Luminaire connected wattage: 16.8 W**  
Luminaire luminous flux: 1 143 lm  
Luminaire luminous efficiency: 68 lm/W  
Colour temperature: 3 000 K (CRI > 80)  
Ambient temperature:  $t_{a \max} = 45^{\circ}\text{C}$

### Round shaft

Cylindrical shaft in Accoya® acetylated glued laminated timber, produced with sawn planks from sustainably managed forests. Timber finished with four coats of woodstain. Cylindrical flush base in galvanized steel, polyester powder coated finish.

### Benefits of Accoya® wood

Accoya® wood has a non-toxic core treatment. It is a very dimensionally stable material (equivalent to the best exotic wood). It is renewable, durable, resistant to moisture, insects, and rot.

### Maintenance and lifespan

Accoya® wood offers a 25-year warranty against rot (if the wood is placed in the ground) and a 50-year warranty for above-ground wood (even if it is continuously exposed to fresh water). Very low maintenance.

### Installation

Fixing with 4 stainless steel anchor studs M12 x 100. Other type of fixing on consultation. Anchor bolts supplied on request only.

Wood material:

