




## MOSHI STRADA

Lighting bollard / 1 165 lm - 14.1 W / Lighting

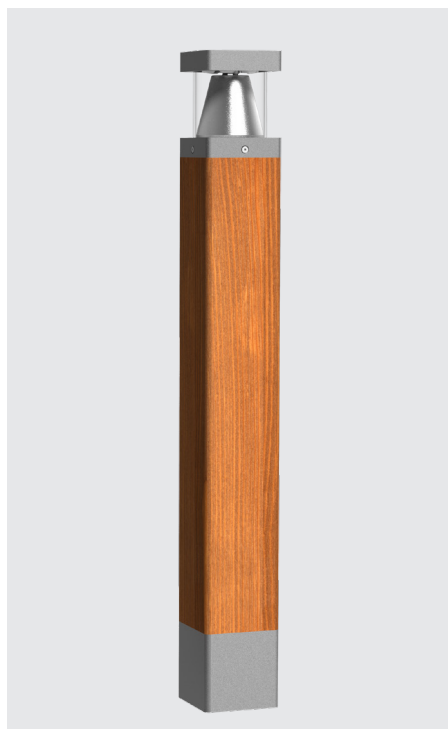

LED	Height	L x l	Base height	Plate dimensions	Spacing dimensions	Fixation hole on plate	Anchor studs	Weight
14.1 W	1 m	120 x 120 mm	120 mm	200 x 200 mm	150 x 150 mm	16 x 24 mm	4 HA20/M12 - 100 mm	22 kg

Finished ground level: 70 mm.

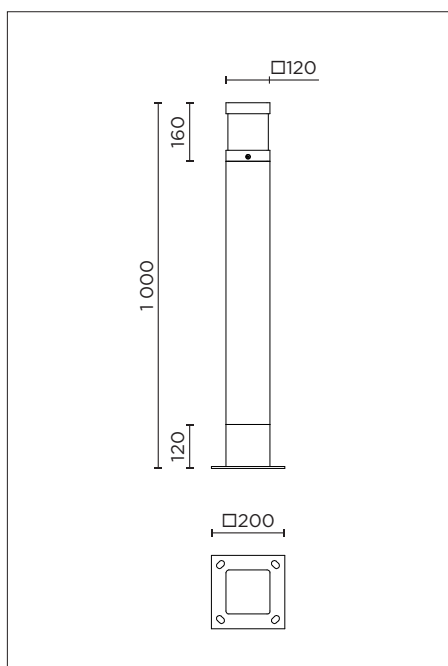

Light distribution  
14.1 W

### Moshi Strada LED light 14.1 W

LED luminaire with shielded light. Extensive light distribution with symmetrical rotation. No distribution box. HO7RNF connection cable of 1 m in 3G1<sup>2</sup>. LED power supply unit 220-240 V - 50-60 Hz. Luminaire made of powder-coated aluminium with stainless steel screws. Clear polycarbonate bowl. Dust-tight and water jet protected.

Safety class I

CE Conformity mark  
Protection class IP 65  
Impact strength IK08

### Lamp

**Luminaire connected wattage: 14.1 W**  
Luminaire luminous flux: 1 165 lm  
Luminaire luminous efficiency: 82.6 lm/W  
Colour temperature: 3 000 K (CRI > 80)  
Ambient temperature:  $t_{a \max} = 45^{\circ}\text{C}$

### Square shaft

Regular square shaft in Accoya® acetylated glued laminated timber, produced with sawn planks from sustainably managed forests. Timber finished with four coats of woodstain. Square flush base and top in galvanized steel, polyester powder coated finish.

### Benefits of Accoya® wood

Accoya® wood has a non-toxic core treatment. It is a very dimensionally stable material (equivalent to the best exotic wood). It is renewable, durable, resistant to moisture, insects, and rot.

### Maintenance and lifespan

Accoya® wood offers a 25-year warranty against rot (if the wood is placed in the ground) and a 50-year warranty for above-ground wood (even if it is continuously exposed to fresh water). Very low maintenance.

### Installation

Fixing with 4 stainless steel anchor studs M12 x 100. Other type of fixing on consultation. Anchor bolts supplied on request only.

Wood material:

