

MOSHI

LIGHTING BOLLARD

HIT* 20 W


MEASUREMENTS

h x L x l: 1 008 x 120 x 120 mm
Weight: 17 kg


STANDARD COLOUR IDENTITY

TOP: Grey 900 sanded.

MOSHI BOLLARD	PMR0174
Height	1 m
Power	20 W
Type of lamp	HIT
Class	I
IP	55

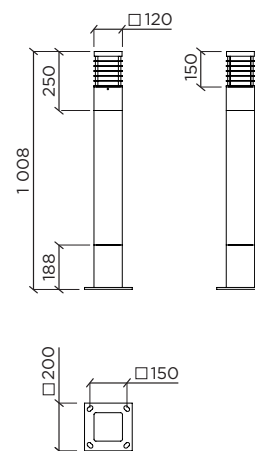
MATERIALS SQUARED SHAFT

Regular squared shaft in glued laminated timber certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with three coats of woodstain. Squared flush base and top in galvanized steel, powder coated polyester finish. Opal polyamide diffuser.


FIXATION

Chemical sealing.
Anchor rods: threaded rod M12 x 200.
Fixation holes on plate: 16 x 24 mm.



Cp Cycle path - **Pf** Pedestrian footpath - **S** Street


HIT* 20 W LIGHT


Top in galvanized steel, powder coated polyester finish.

Opal polyamide diffuser.

Metal halide lamp (not supplied) - G8.5 Socket.

Integrated terminal strip connector - Connection 3 x 2.5² max. + fuse 1A (5x20).

Class I - IP 55 - IK 10.

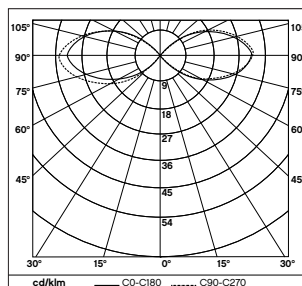

Light diffusion HIT* 20 W.

*HIT: Metal halide with magnetic ballast.