
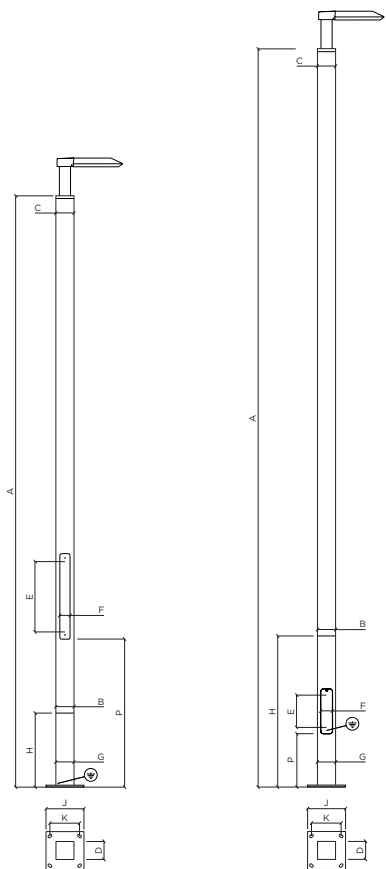


UTYL Square lighting points from 4 m to 5 m
LED 26.5 W - 3 574 lm*




UTYL SQUARE LED 26.5 W*		PCO9416	PCO9566
A	m Pole height	4	5
B	mm Shaft section at base	120	120
C	mm Shaft section on top	120	120
D	mm Door: useful depth	78	78
E x F	mm Door: useful height x width	460 x 60	460 x 60
P	m Distance door bottom to plate	1	0.35
G	mm Base section	120	120
H	m Base height	0.50	1
J	mm Base plate dimensions	260 x 260	260 x 260
K	mm Spacing dimensions	200 x 200	200 x 200
L	mm Anchor rods**	4 HA16 M14 - 300	4 HA16 M14 - 300
	kg Weight	24	27
	m Height of the light	4.20	5.20

- SQUARE SUPPORT**
Regular square shaft in glued laminated timber GL24H certified ACERBOIS GLULAM, produced with sawn planks from sustainably managed forests and respecting HTE process. Timber finished with four coats of woodstain.
Square flush base in galvanized steel and polyester powder coated finish. Overlying top in pressed galvanized steel, polyester powder coated finish. Design and manufacture according to rules defined by DEE 120017-00-0106 Wood and metal lighting columns and specifications from European Technical Approval ETA-18/0016.
- CE marked product: Conformity certificate CE 0679-CPR-0473.**
- STANDARD COLOUR IDENTITY**
Wood: Brume - Metal: Black 100 sanded.

Cpa Car parking area - Pa Public area - Ap Access path - Cp Cycle path - Pf Pedestrian footpath - S Street



- LED LIGHT 26.5 W***
Asymmetrical elliptical lighting.
- 3 574 lm - Colour temperature 4 000 K (T° 3 000 K as option).
Colour rendering index R_a > 80.
Cast aluminium, aluminium and stainless steel.
Safety glass. Reflector in pure anodized aluminium.
Dust-proof and water jet protected.
Delivered with connecting cable X05BQ-F 4 x 1² - Length 7 m.
Power supply LED 220-240 V - 0/50-60 Hz.
DC 170-280 V - Dimmable 1-10 V.
Class II - IP 66 - IK 08 - Weight: 4.4 kg.

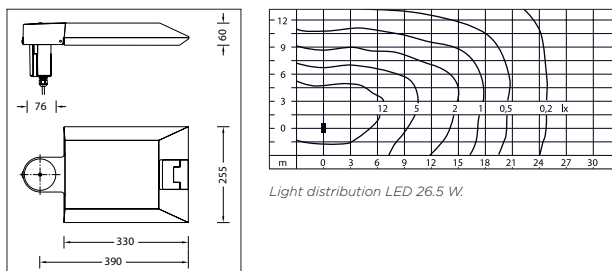

Light distribution LED 26.5 W.

NOTES
Luminaires delivered without case, light head not assembled on the shaft. Possibility to fix the light on bracket or surface mounted on demand.
The lighting fixture must be connected to the earth of the base section thanks to the green/yellow wire provided for that purpose.
*Power and luminous flux data likely to vary.
**Anchor rods supplied on request only.